

## 2A 165°C High rate


### Electrical Characteristics

Nominal capacity	5.0Ah
Open circuit voltage (23±2°C)	≥3.6V
Constant discharge current	150mA (Nominal) 300mA (Max.)
Operating temperature	-40~+165°C
Self-discharge rate	<2% per year


### Physical Characteristics

Cell size	2A
Diameter	17.5mm
Height	102.0mm
Weight	50g
Fuse	No
Series Diode	Yes

### Cell Drawing

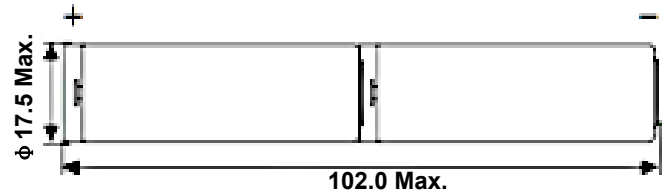

### Discharge curve

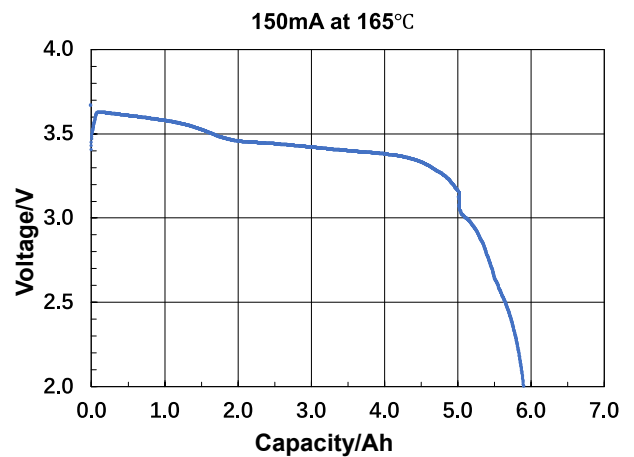

### Key Features

- High energy density
- High single cell voltage
- High rate
- Stable operating voltage
- High operating temperature
- Low self-discharge rate
- UN38.3 for transportation

### Main applications

- Downhole Oil & Gas tool
- Sensor systems
- Wireless and military equipment
- Tracking system
- Pipeline inspection gauge

Please consult with Akku Tronics for further information.  
[www.akkutronics.com](http://www.akkutronics.com)