

## A High rate


### Electrical Characteristics

Nominal capacity	2.5Ah
Open circuit voltage (23±2°C)	≥3.6V
Constant discharge current	50mA (Nominal) 100mA (Max.)
Operating temperature	-40~+150°C
Self-discharge rate	<2% per year


### Physical Characteristics

Cell size	A
Diameter	16.8mm
Height	49.5mm
Weight	25.0g
Fuse	No
Parallel diode	No

### Cell Drawing



### Discharge curve 50mA at 150°C

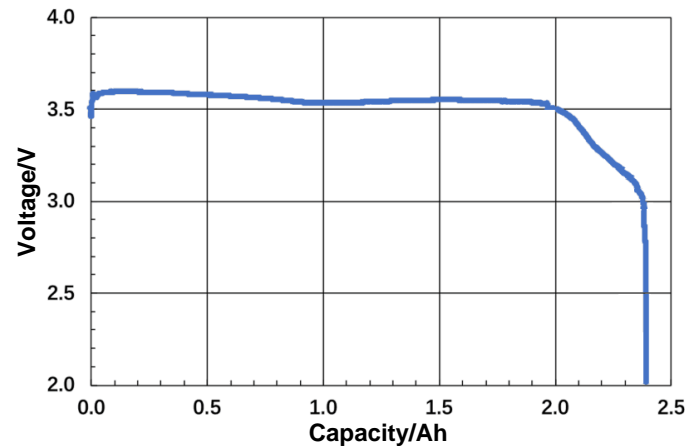

### Key Features

- High energy density
- High single cell voltage
- High rate
- Stable operating voltage
- High operating temperature
- Low self-discharge rate
- UN38.3 for transportation

### Main applications

- Pressure gauge
- Sensor system
- Wireless and military equipment
- Tracking system
- Pipeline inspection gauges

Please consult with Akku Tronics for further information.  
[www.akkutronics.com](http://www.akkutronics.com)